PS03A

Three Channel IEPE Power Supply

TEST & MEASUREMENT PRODUCTS

Product Features

Three channel IEPE Power Supply for accelerometers and piezo velocity transducers

- Simple LED light indicates sensor condition
- Portable, with included wrist strap

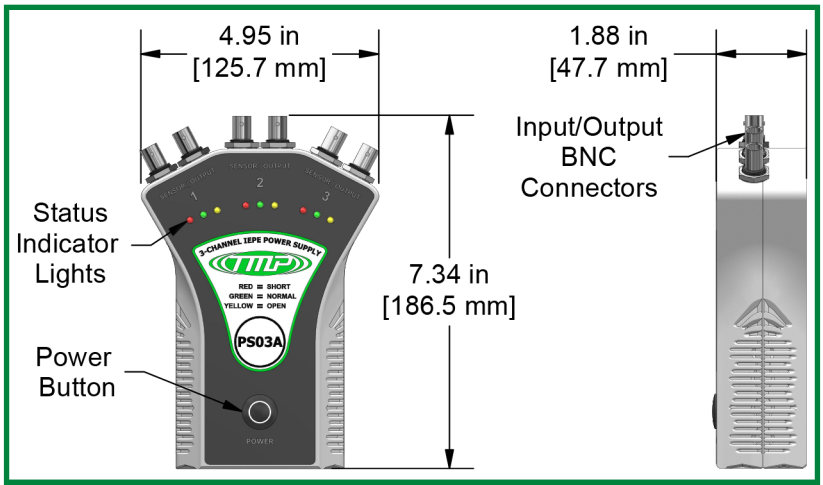

Stock Product

Specifications	Standard	Metric
Electrical		
Input	Four (4) 1.5V "C" Batteries	
Battery Life	65 Hours*	
Input Connector	BNC Jack	
Sensor Supply Current	2 mA	
Environmental		
Temperature Range (Operating)	14 to 130 °F	-10 to 54 °C
Temperature Range (Storage)	-4 to 140 °F	-20 to 60 °C

Specifications	Standard	Metric
Enclosure		
Dimensions	7.43 x 4.95 x 1.88 in.	189 x 126 x 48 mm
Weight (Battery Included)	7.8 oz	220 g
Enclosure Rating	IP40	
Voltage Indicators		
Green	3-17 V — Normal	
Red	<3 V — Short	
Yellow	>17 V — Open	

**Estimated battery life from an alkaline battery while a sensor is connected to the unit.*