


ConnectView™

Web App for Use with
CTC Connect Wireless System

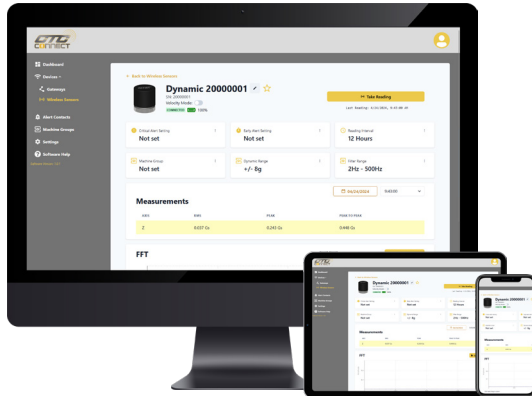

Product Features

Comes preloaded on the ConnectBridge™ Gateway (no additional download required)

Designed for integration with 3rd party vibration data analysis software.

When a WS200 or WS300 sensor battery dies, whatever configuration settings were applied in the web app will remain hard coded on that sensor when battery is replaced.

System agnostic web app runs on network connected gateways out of the box, and is accessible from any PC, laptop, tablet, or smartphone connected to the same network.

Sensor Configuration Options

- Nickname
- Favorite device
- Set early and critical alert values
- Change automatic reading interval (WS 200 & 300)
- Create Machine Group & assign sensors
- Set Dynamic Range (WS 200 & 300)
- Set Sampling Frequency and Resolution (WS 200 & 300)
- Switch between AC and DC output coupling (WS 200 & 300)

Data Viewing

- Time Waveform graph (WS 200 & 300)
- FFT graph (WS 200 & 300)
- Historical readings
- Battery Level
- Connection Status / Last Check In
- Historical Trending Data for vibration and temperature
- Active alerts