
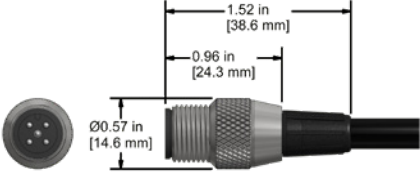

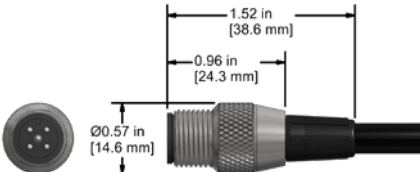

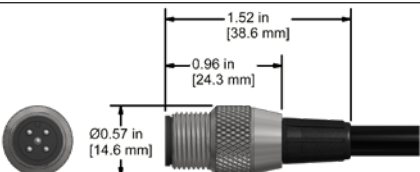

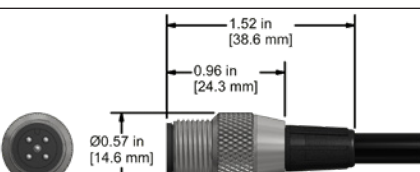

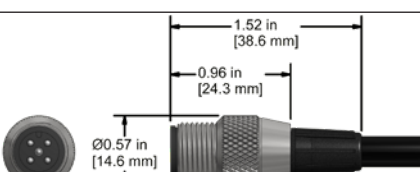

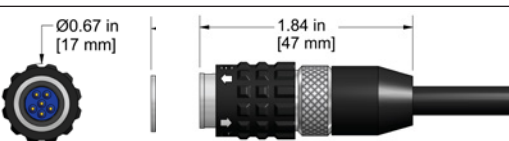

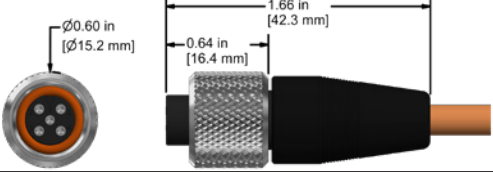

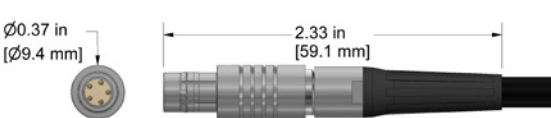

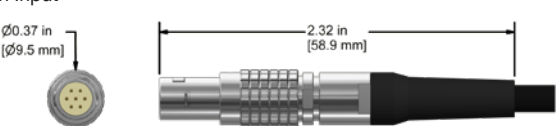


# Data Collector Cable Connectors

Part No.	Cable Side View	Specifications <i>* Channel specification valid when used with J4 connector and CTC triaxial sensor</i>	Front/Bottom View Drawing Side View Drawing
<b>C561</b>		5 Pin Molded M12 Connector, Triaxial Acceleration Input * Ch. 1 = X Ch. 2 = Y Ch. 3 = Z <b>CSI</b> 2130, 2140v	
<b>C562</b>		5 Pin Molded M12 Connector, Triaxial Acceleration Input * Ch. 1 = Z Ch. 2 = X Ch. 3 = Y <b>CSI</b> 2130, 2140	
<b>C565</b>		4 Pin Molded M12 Connector, Triaxial Acceleration Input * Ch. 1 = X Ch. 2 = Y Ch. 3 = Z <b>Azima DLI</b> <b>TRIO™</b>	
<b>C567</b>		4 Pin Molded M12 Connector, Triaxial Acceleration Input * Ch. 1 = Z Ch. 2 = X Ch. 3 = Y <b>Azima DLI</b> <b>TRIO™</b>	
<b>C580</b>		5 Pin Molded M12 Connector, Triaxial Acceleration Input * Ch. 1 = Z Ch. 2 = Y Ch. 3 = X <b>CSI</b> 2130, 2140	
<b>C597</b>		6 Pin ECTA Connector Acceleration Input * Ch. 1 = Z Ch. 2 = Y Ch. 3 = X <b>ACOEM (01dB)</b> <b>Falcon</b>	
<b>C603</b>		Nylon M12 4 Socket Connector Pin A = Power Pin B = Common Pin C = Vibration Signal Pin D = Temperature Signal <b>For Use with TA300 Series Sensors with M12 Connectors</b>	
<b>C604</b>		5 Pin Circular Connector Acceleration Input Pin 1 = Not Used Pin 2 = Vibration Signal Pin 3 = Not Used Pin 4 = Not Used Pin 5 = Common <b>For Use with Erbesd Digivibe MX</b>	
<b>C607</b>		7 Pin Circular Connector Acceleration Input Pin 1 = Signal Pin 2 = Not Used Pin 3 = Not Used Pin 4 = Not Used Pin 5 = Jumper to pin 6 Pin 6 = Jumper to pin 5 Pin 7 = Common <b>For Ultrasonic inputs to SDT 270 Series Data Collectors</b>	

TRIO™ is a trademark of Azima DLI.

**Backed by our Unconditional Lifetime Warranty**

[www.ctconline.com](http://www.ctconline.com)



VIBRATION ANALYSIS HARDWARE