
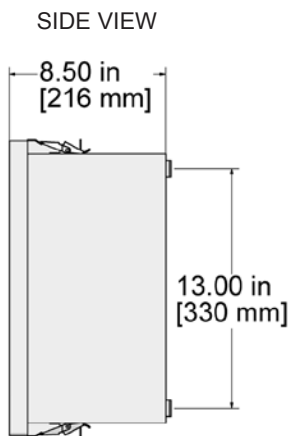


PM110-32 Fiberglass Enclosure

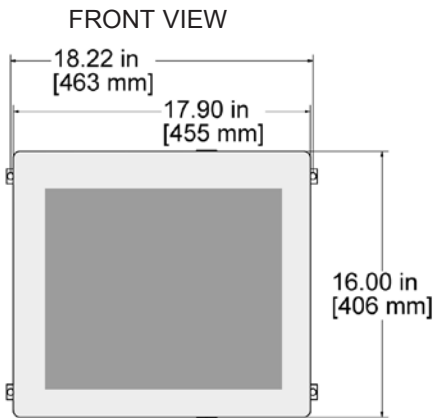

Product Features

Custom Designed Enclosure

Mounts Commtest® vbOnline™ systems for wireless data transmission

- Designed for mounting a vbOnline™ machine surveillance system and managing the wiring for sensors, tachometers and digital inputs
- Protection from dirt, dust, oil and water, while window unit provides viewing area for vbOnline™
- Strong, molded fiberglass reinforced polyester construction with matching flat cover

Specifications

Nema 4X (IP66 equivalent)
UL 508, Type 1, 2, 3, 3R, 4, 4X, 12, 13
CSA Certified LR 89590 for use with industrial control equipment CSA Enc. 1, 2, 3, 4, 4X, 12, 13
304 Stainless Steel back plate
UV resistant polycarbonate viewing window
304 Stainless Steel snap latches feature padlock hasp
Continuous Stainless Steel hinge
Gasket made of closed cell neoprene cord encased in continuous channel
304 Stainless Steel wall mounting feet with 10-32 Stainless Steel screws included
UV stabilized for outdoor use
Includes DC Power Supply, 100-200 VAC Input

Ordering Information

PM110 - 32



- A = User Defined cable entry
- B = Three 1 1/2" conduit fitting, power with 1/2" conduit fitting
- C = Five 3/4" large cord grips, power with 1/2" conduit fitting
- D = Thirty-Six cord grips, power with 1/2" fitting

vbOnline™ is a registered trademark of Commtest® Instruments, LTD.

PM110-32D

vbOnline™ Enclosure, with 36 small cord grips installed and conduit bushing for power

