





Standard Cable




Armored Cable

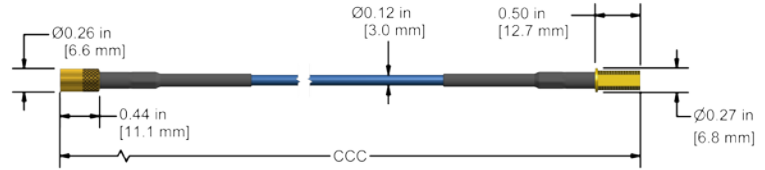

### Connector Protector Option

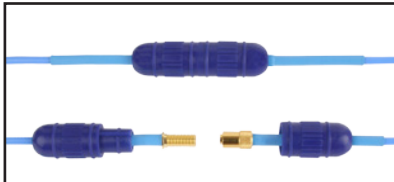

### Protective Adhesive Gel Option

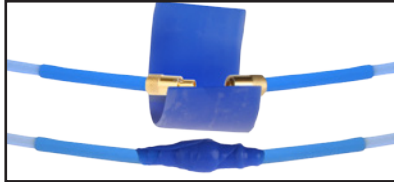

## Product Features

**Bently™ Compatible DX330930 extension cables match with DX3309 series probes and DX330980 series drivers to form a complete assembly to monitor vibration and shaft position.**

- Matched with Bently™ compatible FFv probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

## Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Connector pull strength up to 70 lbs
Matched to 5 & 7 meter system lengths
Male & Female miniature 12-32 threaded connectors
FEP jacketed cable, available with optional 304 stainless steel armor jacket

## Ordering Information

**DX330930**



System Length  
(REFERENCE ONLY)

50 = 5.0 meter

70 = 7.0 meter

Total Length of Extension Cable	Armor	Regulatory Approval
040 = 4.0 meter	00 = No	00 = CE Certified
045 = 4.5 meter	01 = Yes	
060 = 6.0 meter	02 = No, with connector protector	
065 = 6.5 meter	03 = Yes, with connector protector	



**Example Part Number: DX330930-040-00-00**  
4.0 meter total length, no armor, CE certified

