


Factory Installed Cable Connectors

J2A

2 Socket, mini-MIL

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206



IP66


Build To Order

J4A

4 Socket, mini-MIL

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



IP66


Build To Order

J2C

2 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-)	250° F (121° C)	CB108, CB110, CB206

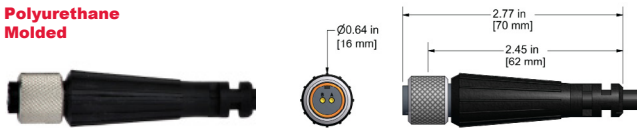


Build To Order

J4C

4 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119

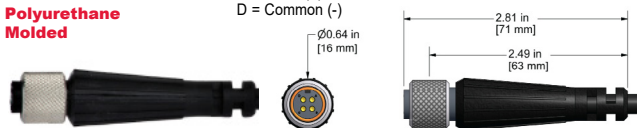


Build To Order

J2N

2 Socket, mini-MIL

Nylon Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206



IP66


Build To Order

J4N

4 Socket, mini-MIL

Nylon Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



IP66


Build To Order

J2P

2 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206

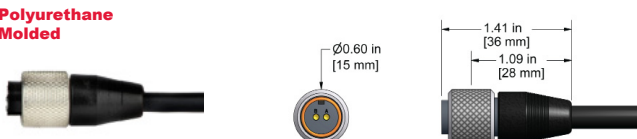

IP66


Build To Order

J4P

4 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218

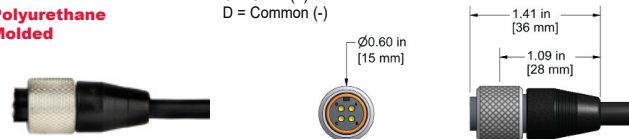

IP66

Build To Order

J2RX

2 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206, CB 602, CB 606



IP66


Build To Order

J4RX

4 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218, CB 618

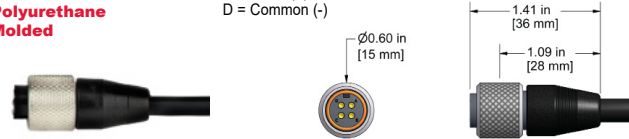

IP66

Build To Order



Backed by our Unconditional Lifetime Warranty